



Installation:

- The equipment should be placed in the corresponding area, and the leg levelers wound down to secure the game and stop it moving while being operated.
- As shown in Figure 3, install the light sign corresponding to the hole positions. Secure the screws; connect the wiring accordingly.
- 30 supplied balls should be put into the machine, 15 balls into each hopper in the rear of the cabinet (Upper door).
- Install the two plungers. Carefully connect the LED harness and hook the plunger assembly into the groove and secure with the bolt.
- Install the two side LED acrylics using the provided M4 screws.
- Power ON.

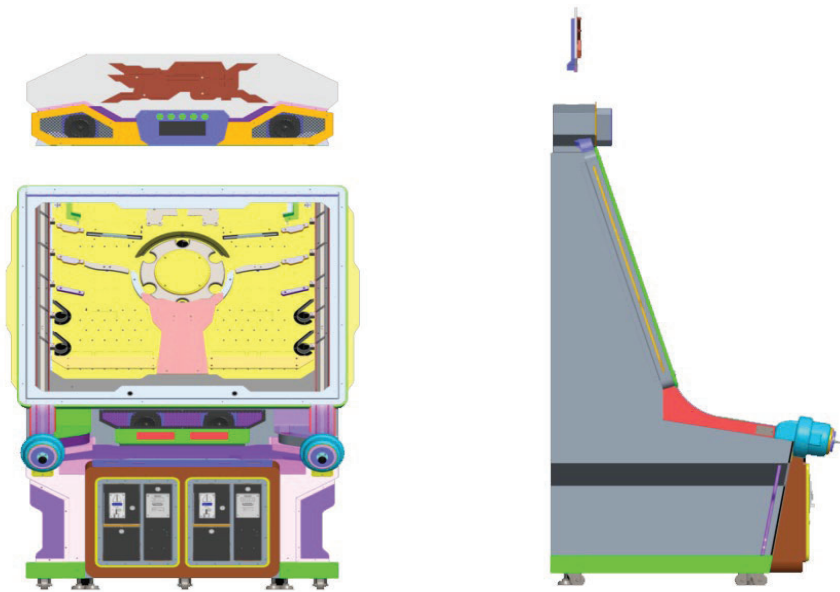

Picture3 Light Signage Assembly Diagram

Playfield Layout & Settings menu information

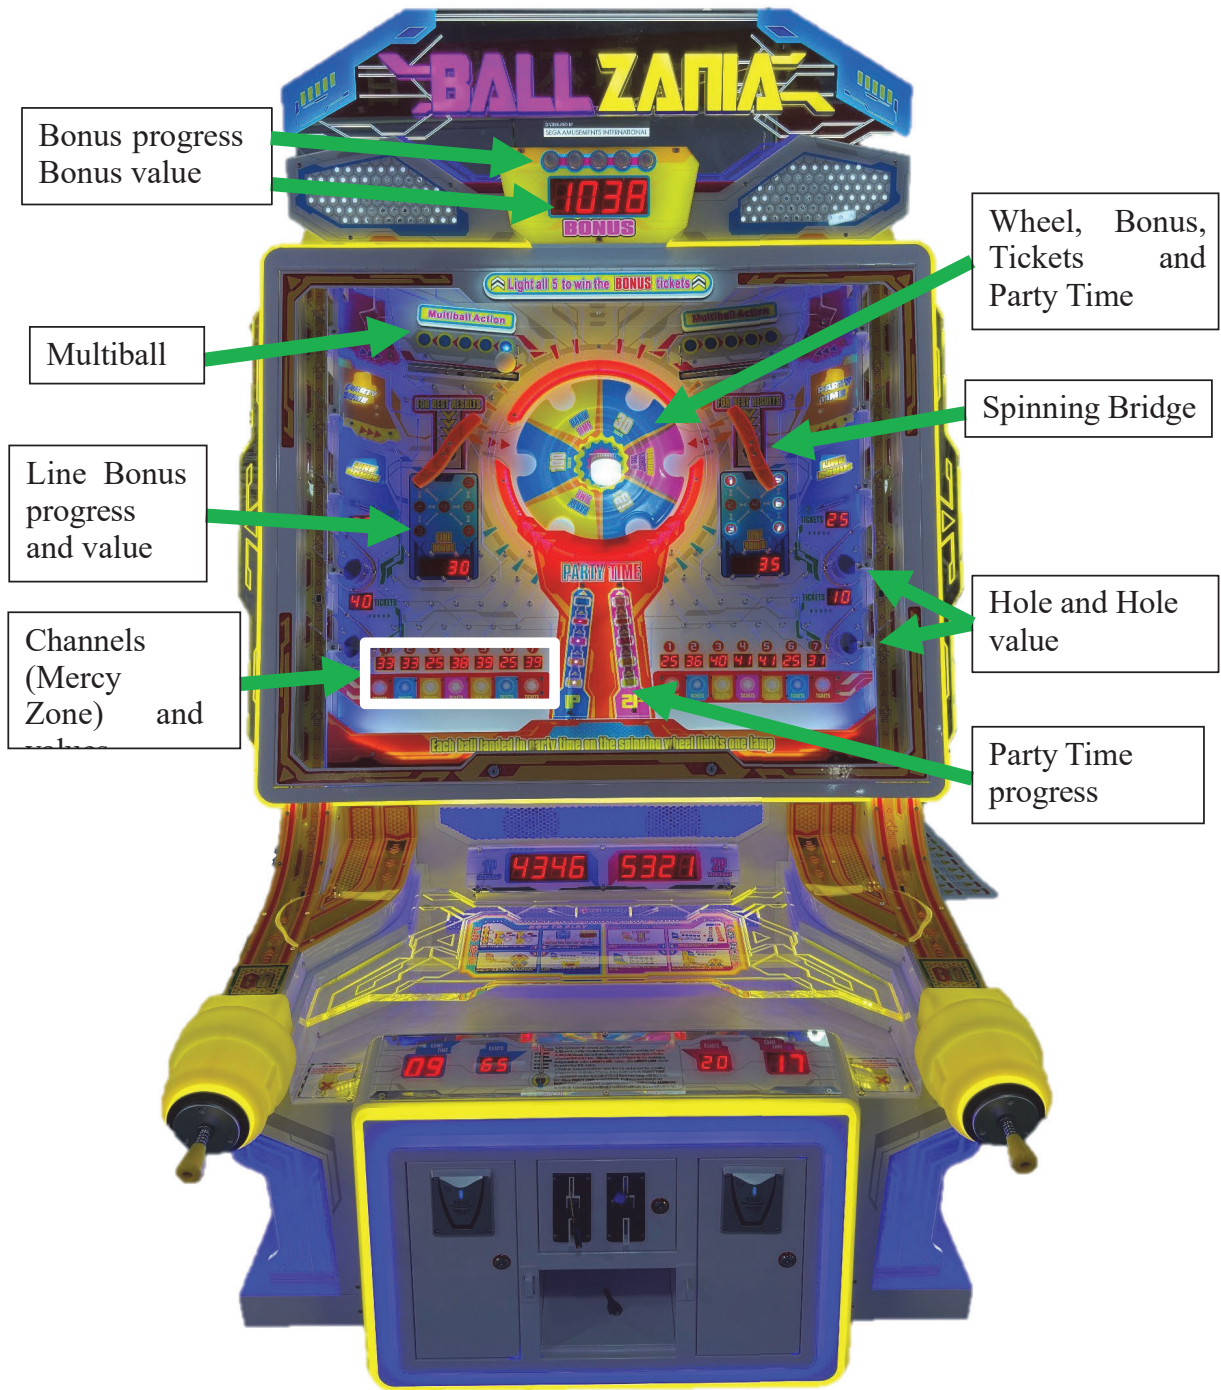

Press online/enquiry to enter bookkeeping.

Online/Enquiry

Cancel

Left

Right

Press download/test to enter test mode.

Download/Test

Confirm

Press confirm to enter settings menu, use up and down to navigate, and up/down/left/right to adjust settings depending on the current setting selected.

It is important to note that the left unit (Machine #1) is the master unit, and changing the settings will not be reflected on both sides. Therefore, you should change the settings on both sides and ensure they match to avoid any confusion.
The only exception should be the channel values, as they should be in reverse order on Machine #2

