

ESM49HCTD BLACK XT/IN

*Cold Space Merchandiser®
Double Swing Door*

Project Name: _____

Item #: _____ Quantity: _____



| Width* | Depth** | Height*** | Shelves | Ship Weight | Ship Cube | Cooling Capacity | Electrical |
|----------------|---------------|----------------|---------|-------------------|----------------------------------|------------------|--|
| 54" 1372 mm | 31" 788 mm | 78" 1982 mm | 12 | 462 lbs 210 kg | 82 cu. ft 2.32 m ³ | 1/4 HP | 115V/4.3 Amp/60 Hz - Single Phase - NEMA 5-15P, Dedicated Circuit |

** Add 1" (26mm) for Power Cord ***Add 3/8" (10mm) for Threaded-In Levelers. Millimeters rounded up.

Custom Graphics Optional.

| Flat Shelf 20 oz /600ml | | Gravity GlideSet™ 20 oz /600ml | | Trailerload Quantity (53') |
|-------------------------|---------|--------------------------------|---------|----------------------------|
| Packout | Facings | Packout | Facings | |
| 560 | 16 | 560 | 16 | 33 |

Premium Features



Cassette® Refrigeration



Finless Free&Clear™
Condenser Coil



LED Lighting System



Automatic Stainless Steel
Condensate Control System



Front Breathing
Refrigeration



Priority Air-Flow



HABCO
Insulated Glass

ESM49HCTD BLACK XT/IN: Designed to optimize merchandising experience to the highest standards of quality and performance.

Refrigeration:

- Self contained Cassette® forced-air refrigeration employs R290 hydrocarbon Natural Refrigerant within a sealed capillary tube system.
- Cassette® refrigeration is bottom-mounted and removable from the front for ease of maintenance. Refrigeration may be exchanged or upgraded without mechanic. Designed to operate at a set point between 34°F to 39°F (1°C - 4°C).
- Priority, directed air flow provides optimum cooling and energy efficiency within cabinet and exclusively at front of unit for optimized heat exchange ventilation.
- Finless, Free&Clear™ Condenser Coil maximizes air-flow over the compressor, reduces energy consumption and is non-clogging.
- Automatic, stainless steel condensate control system.
- Self-lubricating and sealed motors with streamlined air-flow provide quieter yet robust refrigeration.

Cabinet:

- Exterior – durable textured black.
- Interior – NSF approved black aluminum liner with stainless steel floor.
- Ergonomic raised interior floor.
- Space Saving Design – air ventilation exclusively from the front of unit.
- Insulation – cabinet is foamed-in-place with eco-conscious, polyurethane insulation.
- Heavy duty thread-in leveler legs.

Doors:

- Self-Closing Swing Doors feature hold-open position, and spring-back protection.
- Magnetic gaskets are single piece bead-mount construction easily removable for cleaning.
- Heat Reflecting HABCO Insulated Safety Glass with black extruded frame.
- Integrated, injection molded pocket handle(s).

Lighting:


- Energy Efficient LED Lighting System for crisp Illuminated Signage and Interior Display, on Switch.

Storage:

- Twelve (12) white coated shelves 24 1/2"W x 21 1/2"D (623mm x 547mm), are NSF approved.
- Heavy duty aluminum shelving pilasters will not peel or chip adjustment of 1/2" (13mm) increments.
- NSF-7 compliant for storage or display of pre-packaged aseptic product.

Electrical:

- Factory power cord installed for connection to a sole-use (dedicated) 115V/60Hz/1-Phase, 15 Amp circuit.

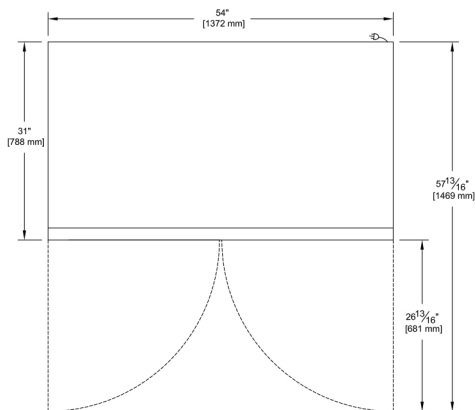

©2017 HABCO Manufacturing Inc. HABCO is a registered trade mark of HABCO Manufacturing Inc. in Canada, USA, U.K. and Germany. HABCO logo design, Built to Perform. Crafted to Last. and CASSETTE are registered trademarks of HABCO Manufacturing Inc. in Canada and U.S.A. Additional trade marks may be employed by HABCO and have been duly noted with respective registration mark or trade mark symbol. DOMESTIC AND INTERNATIONAL PATENTS.