

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

ITS SMALL SIZE MAKES THIS AN IDEAL COOLER FOR PLACES WITH **LIMITED SPACE**.




➤ KEY FEATURES


- **PA refrigeration system,** allow to cool down the interior and maintain the temperature range with a minimum energy consumption.
- **30 gauge exterior pre-painted steel,** brings years of duration.
- **Electronic temperature controller,** assures an optimal performance of the cooler, making the product temperature ideal for its consumption.
- **High efficiency glass door,** with a double panel and a low-e film reduces the condensation. Self closing system allow the door to get back to its original position, taking care not to damage it.
- **LED lighting system,** uses a portion of the energy of regular fluorescent lights, and need no replacement for seven years.
- **CFC and HFC free Cyclopentane foam** is eco-friendly and a high efficiency insulator.

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

PRODUCT VIEWS

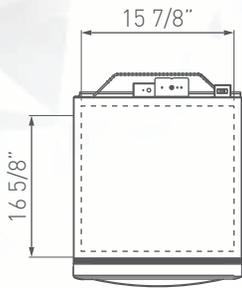

TOP VIEW

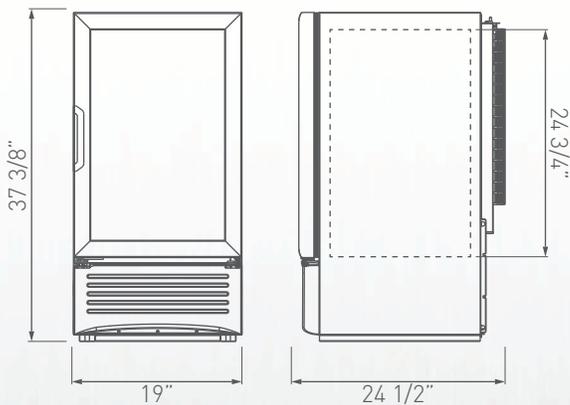

FRONT VIEW

SIDE VIEW

Warranty:

One year limited warranty on all parts and labor, an additional 4 year warranty on compressor. (USA and Canada only)

Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

Customer Service: 866-363-0079 | WWW.IMBERAFOODSERVICE.COM

TECHNICAL SPECIFICATIONS

Exterior Dimensions	L:	19"	482 mm
	D:	24 1/2"	618 mm
	H:	37 3/8"	950 mm

Interior Dimensions	L:	15 7/8"	404 mm
	D:	16 5/8"	422 mm
	H:	24 3/4"	630 mm

Shelf Size	L:	15 1/4"	386 mm
	D:	14 5/8"	371 mm

Weight		96.3 Lbs	43.7 Kg
--------	--	----------	---------

Shelves		3
---------	--	---

Capacity 20oz.	Flat:	50
----------------	-------	----

REFRIGERATION DATA

Energy Consumption	1.210 kWh/day
--------------------	---------------

Voltage	115/60
---------	--------

Horse Power	1/6
-------------	-----

AMPS	2.1
------	-----

LOGISTIC

Trailer Loads	40':	136
	53':	176

Certifications	UL:	✓
	ES:	✓
	EPH/NSF:	✓

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

PA System (Active Sides).

Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.