

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

DESIGNED TO KEEP COLD PRODUCTS IN **EASY REMOVAL CONTAINERS**, TO FACILITATE ITS INTERNAL DISTRIBUTION.






➤ KEY FEATURES

- **PA refrigeration system,** allow to cool down the interior and maintain the temperature range with a minimum energy consumption.
- **30 gauge exterior pre-painted steel,** brings years of duration.
- **Function's intelligent controller CIF,** maintains temperature efficiently based on surrounding conditions, self adjusting to the right temperature.
- **Solid door,** Designed to reduce heat transference, making the equipment more efficient.
- **CFC and HFC free Cyclopentane foam,** is eco-friendly and a high efficiency insulator.

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

PRODUCT VIEWS

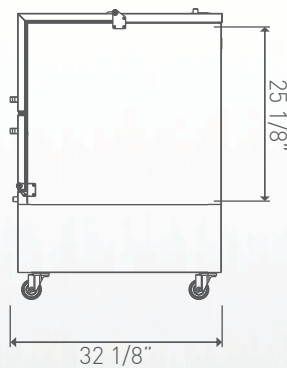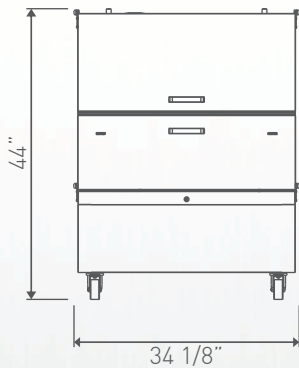

TECHNICAL SPECIFICATIONS

Exterior Dimensions	L:	34 1/8"	868 mm
	D:	32 1/8"	817 mm
	H:	44"	1119 mm

Interior Dimensions	L:	28 7/8"	734 mm
	D:	27 1/2"	697 mm
	H:	25 1/8"	637 mm

Shelf Size	L:	28 3/8"	720 mm
	D:	26"	660 mm

Weight	177.5 Lbs	80.5 Kg
--------	-----------	---------

Shelves	1
---------	---

REFRIGERATION DATA

Energy Consumption	1.440 kWh/day
--------------------	---------------

Voltage	115/60
---------	--------

Horse Power	1/3
-------------	-----

AMPS	6.2
------	-----

LOGISTIC

Trailer Loads	40':	56
	53':	72

Certifications	UL:	✓
	ES:	✓
	EPH/NSF:	✓

Warranty:

One year limited warranty on all parts and labor, an additional 4 year warranty on compressor. (USA and Canada only)

Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

Customer Service: 866-363-0079 | WWW.IMBERAFOODSERVICE.COM

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.