



TALOS™

# THE NEXT GENERATION OF NOTE VALIDATION

**Built on a legacy of over 20 years of MEI reliability and performance, CPI presents the industry's most modular note validation system**

- CPI Synq™ module compatibility provides access to mobile maintenance and repair guides
- Mobile device connectivity, paired with Simplifi™ mobile app, reduces at-machine service time by up to 50%
- 100% backwards capability enables seamless integration with existing bezels to streamline spares inventory
- Improved jam performance provides 50% decrease in jams as compared to previous models, allowing for fewer service calls and increased uptime
- Enhanced sensor technology and the industry's widest note coverage provide best in class fraud protection, ensuring rejection of all known counterfeits
- 2x faster note validation than previous models provides higher throughput during peak hours
- USB connection ensures seamless upgrades and data retrieval, reducing at-machine upgrade time by up to 80%




**Pair the Talos bill validator with the CPI Synq module for a fully-connected solution.**

# Talos Bill Validator Specifications & Benefits

## Configuration and Options

### Talos Model Configuration Sample

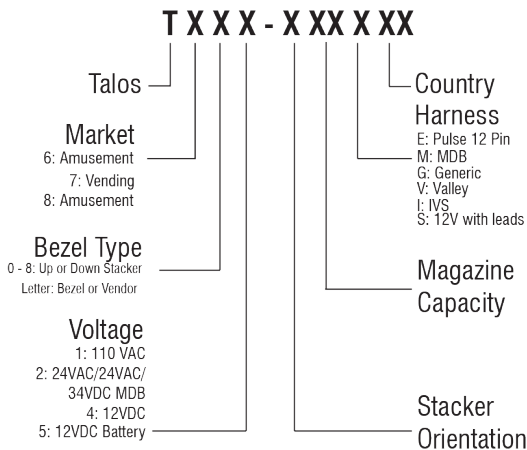

### Magazine Options

Part Number	Description
250063015	200 Bill Magazine
250061016	300 Bill Magazine
253115019	500 Bill Magazine
250068021	700 Bill Magazine
250060086	1000 Bill Magazine (4pk)

### Bezel Options

Part Number	Description
250011005P	Compact Bezel
250022067P	High Visibility Bezel
250028086P	VFM Retrofit Bezel

## Specifications

### Acceptance Rate

95% or greater for \$1, \$5, \$10, \$20, \$50 and \$100, at nominal conditions.

### Bill Insertion

Lengthwise, four way (Face up/down, either direction).

### Transaction Speed

Approximately 2.5 seconds – from bill insertion to completed bill-stacking.

### Environment

- Operating Temperature: -15C to 60C
- Storage Temperature: -40C to 70C
- Humidity: 5% to 95% relative humidity (non-condensing), maximum relative humidity of 50% at extreme temperatures.

### Interfaces

ILLP, NILLP, MDB, NISR, IP, NIP, EBDS, NIP+

### Power Sources

90 to 135 VAC, 60Hz or 18 to 28 VAC, 60Hz, 22VDC to 45VDC or 12VDC

### Power Consumption

- Standby: 5 Watts
- Acceptance: 10 Watts
- Full Stack Max: 50 Watts

### Shipping Weight

Four Pounds

### Escrow

One bill



CPI has made every effort to assure that the information in this document is accurate. However, we cannot be held responsible for any errors or omissions. ©2018 Crane Payment Innovations. All rights reserved.

CranePI.com