

Gemini Antenna



Industrial grade, versatile small size, high performing ultra-wideband cellular antenna with both a primary and diversity leads (MIMO) in a single base. Rated for outdoor use. Easy to install with a magnetic mount that can be used on any ferromagnetic (iron or steel) metal surfaces.

Ideal for multipurpose applications where a magnetic mount can be utilized. Can be used in outdoor settings.


Part Number	Mount Type
OC-1062	Magnetic Mount
Specifications	
Dimensions	2.1" X 2.7" X 2.3"
Weight	0.3 lbs

Applications

ATMs, Digital Signs, Kiosk, Vending Machine, Gaming Equipment, Access Controls, HVAC, Alarm Panels, Amusement, Credit Card Terminal, Juke Box, Laundry Equipment, Monitoring Equipment, Smart Safe, Smart Locker, Petroleum Gauges,





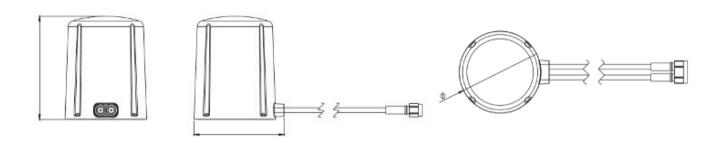

Gemini Antenna Technical Specifications	
Electrical Specifications	
Frequency	698 - 960 MHz, 1710 - 2170MHz 2500-2700 MHz
Nomincal Impedance	5 Ω
VSWR	<2.7:1 @ 698-960 <1.5:1 @ 1710-2170 <1.4:1 @ 2500-2700
Radiation Pattern	Omni -Directional
Average Gain	4.2 dBi @ 698-960 2.9 dBi @ 1710-2170 3.0 dBi @ 2500-2700
Peak Gain	0.1 dBi @698-960 2.9 dBi @ 1710-2170 3.5 dBi @ 2500-2700
Polarization	Linear
Environmental Specifications	
Operating Temperature	-40 to +85 C -40 to 185 F
Storage Temperature	-40 to +85 C -40 to 185 F
Substance Compliance	RoHS
Ingress Protection Rating	IP67 & IP69 Weatherproof Rated



AVS Companies avscompanies.com

- **(**847) 439-9400
- info@avscompanies.com

